


Instructions: ChronoDivers CD200SX NH35A Automatic

Thank you for purchasing a **ChronoDivers 200m Diver's Watch – CD200SKX**

Always ensure crown is **SCREWED IN TIGHT**

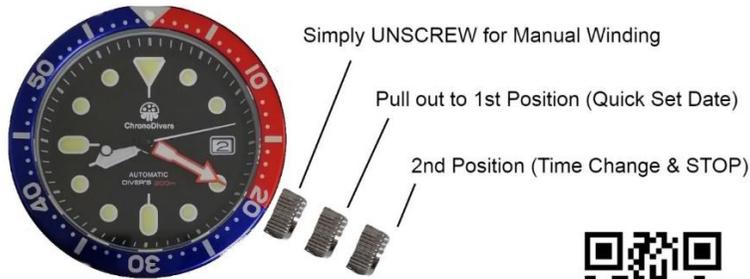

Watch our Video on Quick Setting the Date >>

IMPORTANT - incorrect setting of date may damage the mechanism



Your watch is installed with a high quality Seiko NH35A Automatic watch movement. Please read the instructions before attempting to change the time or date. Thank you.

SETTING THE DATE

1. **UNSCREW the crown** (the crown must always be screwed back tight after any adjustments to ensure water resistance)
2. Pull out the crown to the 1st position (one click).
3. Rotate the crown clockwise (upward) to set the date.
4. Push the crown back in to the normal crown position.
5. **LOCK down the crown** (screw it back tight)

Important: Do **not** change the date between 9:00 PM (21:00) and 4:00 AM as this may damage the functionality and operation of the calendar. If in doubt – please watch the video here > <https://youtu.be/BnG8BiUg4EY> or click the QR above with your phone's camera.

SETTING THE TIME

1. UNSCREW the crown
2. Pull out the crown to the 2nd position (two clicks).
3. Rotate the crown to set the hour and minute hands.
4. Push the crown back in to the normal crown position.
5. **LOCK down the crown** screw it back tight)

HACKING THE SECOND HAND

The second hand can be stopped to synchronize the time to another watch.

1. To stop the second hand, pull out the crown to the 2nd position.
2. Push the crown back in to the normal crown position when ready to synchronize
3. **LOCK down the crown** (screw it back tight)

WINDING THE MAINSPRING BY SIMPLY WEARING THE WATCH

By simply wearing the watch on your wrist, the mainspring is wound automatically as a result of the natural motion of your arm.

WINDING THE MAINSPRING MANUALLY

1. Unscrew the crown.
2. Rotate the crown counter clockwise (downward) 8 times in the normal crown position and shake the watch slightly.
3. **LOCK down the crown** (screw it back tight)

WINDING THE MAINSPRING USING A WINDING MACHINE

- Rotary Speed: 30 rpm
- Operating Time: 60 minutes

DETERMINING 12 AM MIDNIGHT

1. Pull out the crown to the 2nd position.
2. Rotate the crown clockwise (upward) to advance the hour and minute hands until the date changes, which indicates 12 AM midnight.
3. Keep rotating the crown clockwise to set the hour and minute hands to the exact time.
4. Push the crown back in to the normal crown position.
5. **LOCK down the crown** (screw it back tight)

(Now that you've established AM/PM you can change the date as needed. **Do not change the date between 9:00 PM (21:00) and 4:00 AM** as this may damage the functionality and operation of the calendar.)

Mechanical watch movements are delicate mechanisms built to precise standards. To ensure that your watch operates with perfect precision for many years to come, please familiarize yourself with the following:

Accuracy: The average accuracy tolerance for the NH35 movement is around -20/+40 seconds per day under normal operating conditions. Accuracy depends very much on the natural motion of your arm.

Service Intervals: As with most precision machines, an automatic watch must be serviced regularly to maintain peak performance. We recommend that you have your watch professionally serviced every 5 to 6 years. A shorter service interval may be required depending on the climate and conditions the watch is exposed to.

Love Dive Watches? We do 🍷🕒👉❤️ please visit us at

ChronoDivers.com

ChronoDivers CD200SKX

Instruction Manual



Warranty Details

Your new watch comes with a 12 month warranty. Please ensure the crown is ALWAYS screwed down tight. Warranty claims for water resistancy will be rejected if there is evidence of water ingress via the crown tube.

To make a warranty claim – in the first instance please send an email to info@chronodivers.com and include details of the original purchase